


Lifting Chain Winner pro Pewag, Flex 200

Product information

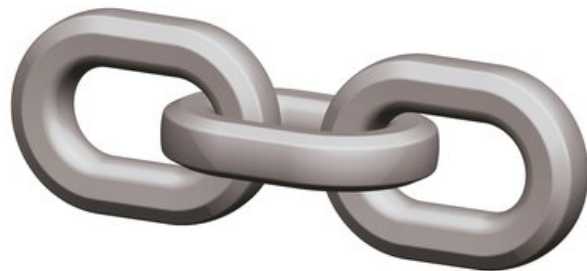

Profile steel chain in grade 12 for lifting.

Features: Strong, flexible and efficient.

Material: Alloy steel

Marking: Manufacturer ID, grade

Temperature range: -40°C up to +200°C.

Finish: Light grey powdercoated.

Note: Not to be heat-treated.

Safety factor: 4:1

Grade: 12

| Part Code | Chain diameter mm | WLL ton | Min. Breaking force, kN | b1 min. | b2 max. | dn mm | t mm | Weight kg | Delivery time |
|-----------------|----------------------|------------|----------------------------|---------|---------|----------|---------|--------------|---------------|
| 204100700000050 | 7 | 2.36 | 92.6 | 10 | 26 | 7 | 22 | 1.36 | 10 |
| 204100800000050 | 8 | 3 | 118 | 11.2 | 29 | 8 | 25 | 1.64 | 10 |
| 204101000000050 | 10 | 5 | 196 | 14.2 | 37 | 10 | 33 | 2.7 | 10 |
| 204101300000050 | 13 | 8 | 314 | 18.6 | 50 | 13 | 41 | 4.8 | 10 |
| 204101600000050 | 16 | 12.5 | 491 | 22.8 | 60 | 16 | 51 | 7.17 | 10 |

Blueprint

