


## Wire Pulley Sheave, type BR

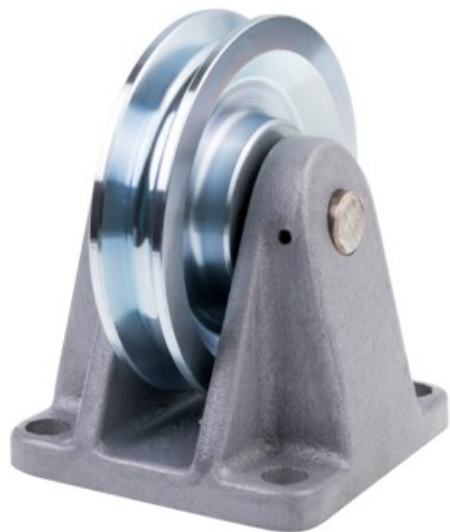

### Product information

Pulley sheaves for rope deflection with plain bearing, with honed steel axle. Grooved profile turned to DIN 15061.

**Material:** Sheave: S355J2. Mounting plate: gray cast iron GG20.

**Finish:** Wire rope sheave: galvanized, mounting plate: painted.

**Note:** Also available with ball-bearing, for higher load.

| Part Code    | Rope Ø range mm | Type     | Max load ton | D1 mm | D2 mm | R mm | A x B    | C mm | E x F   | H mm | øL | Weight kg | Delivery time |
|--------------|-----------------|----------|--------------|-------|-------|------|----------|------|---------|------|----|-----------|---------------|
| 140100600130 | 2-6             | BR 050 G | 0.3          | 50    | 38    | 3,2  | 67 x 67  | 7    | 50 X 50 | 35   | 7  | 0.6       | 10            |
| 140100800130 | 3-8             | BR 075 G | 0.6          | 75    | 59    | 4,2  | 75 x 75  | 10   | 60 X 60 | 50   | 9  | 1.4       | 10            |
| 140100900130 | 4-9             | BR 100 G | 0.9          | 100   | 80    | 4,8  | 90 x 90  | 10   | 70 X 70 | 65   | 12 | 2.5       | 10            |
| 140101000130 | 6-10            | BR 125 G | 1.1          | 125   | 103   | 5,3  | 92 x 92  | 10   | 70 X 70 | 75   | 12 | 3.2       | 10            |
| 140101200130 | 8-12            | BR 150 G | 1.25         | 150   | 126   | 6,5  | 12 x 100 | 12   | 75 X 90 | 90   | 14 | 4.8       | 2             |

# Blueprint

