


Anchor Starcon Load Group 7,5 t

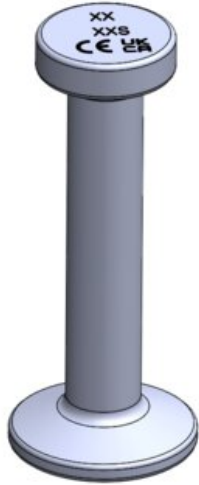

Product information

The Starcon spherical head anchor load group 7,5 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

Marking: CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

Finish: Untreated, hot dip galvanized or stainless

Note: The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011007500851	7.5t	85	Untreated	24	47	60	120	0.62	2
65011007501201	7.5t	120	Untreated	24	47	60	120	0.73	100
65011007501202	7.5t	120	HDG	24	47	60	120	0.73	100
65011007501401	7.5t	140	Untreated	24	47	60	140	0.81	100
65011007501402	7.5t	140	HDG	24	47	60	140	0.81	100
65011007501651	7.5t	165	Untreated	24	47	60	165	0.89	2
65011007501652	7.5t	165	HDG	24	47	60	165	0.89	2
65011007502001	7.5t	200	Untreated	24	47	60	200	1.01	2
65011007502002	7.5t	200	HDG	24	47	60	200	1.01	2
65011007503001	7.5t	300	Untreated	24	47	60	300	1.36	2
65011007503002	7.5t	300	HDG	24	47	60	300	1.36	2
65011007505401	7.5t	540	Untreated	24	47	60	540	2.24	100
65011007505402	7.5t	540	HDG	24	47	60	540	2.24	100

Blueprint

