


Anchor Starcon Load Group 5,0 t

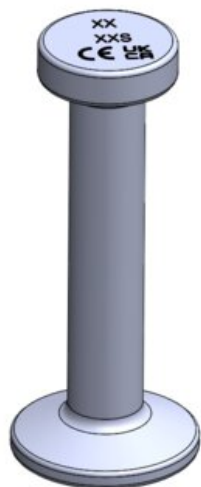

Product information

The Starcon spherical head anchor load group 5,0 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

Engelsk: The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

Marking: CE-marked, UKCA-marked, UKCA, Batch code, Load group+S (Starcon)

Finish: Untreated, hot dip galvanized or stainless

Note: The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011005000751	5.0t	75	Untreated	20	36	50	75	0.34	100
65011005000752	5.0t	75	HDG	20	36	50	75	0.34	2
65011005000851	5.0t	85	Untreated	20	36	50	85	0.36	2
65011005000852	5.0t	85	HDG	20	36	50	85	0.36	2
65011005000951	5.0t	95	Untreated	20	36	50	95	0.4	2
65011005000952	5.0t	95	HDG	20	36	50	95	0.4	100
65011005001101	5.0t	110	Untreated	20	36	50	110	0.43	100
65011005001102	5.0t	110	HDG	20	36	50	110	0.43	2

65011005001201	5.0t	120	Untreated	20	36	50	120	0.46	100
65011005001202	5.0t	120	HDG	20	36	50	120	0.46	100
65011005001401	5.0t	140	Untreated	20	36	50	140	0.49	100
65011005001402	5.0t	140	HDG	20	36	50	140	0.49	2
65011005001601	5.0t	160	Untreated	20	36	50	160	0.56	2
65011005001602	5.0t	160	HDG	20	36	50	160	0.56	2
65011005001801	5.0t	180	Untreated	20	36	50	180	0.61	100
65011005001802	5.0t	180	HDG	20	36	50	180	0.61	2
65011005002101	5.0t	210	Untreated	20	36	50	210	0.69	100
65011005002102	5.0t	210	HDG	20	36	50	210	0.69	2
65011005002401	5.0t	240	Untreated	20	36	50	240	0.76	2
65011005002402	5.0t	240	HDG	20	36	50	240	0.76	2
65011005003401	5.0t	340	Untreated	20	36	50	340	1.01	100
65011005003402	5.0t	340	HDG	20	36	50	340	1.01	2
65011005004801	5.0t	480	Untreated	20	36	50	480	1.36	2
65011005004802	5.0t	480	HDG	20	36	50	480	1.36	2

Blueprint

