


## Anchor Starcon Load Group 5,0 t

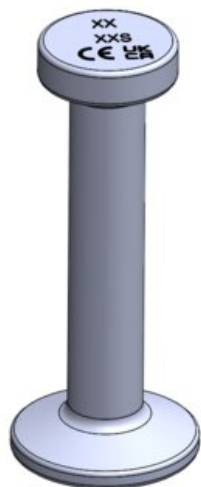

### Product information

The Starcon spherical head anchor load group 5,0 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

Engelsk: The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, UKCA, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

**Note:** The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011005000751	5.0t	75	Untreated	20	36	50	75	0.34	100
65011005000752	5.0t	75	HDG	20	36	50	75	0.34	2
65011005000851	5.0t	85	Untreated	20	36	50	85	0.36	2
65011005000852	5.0t	85	HDG	20	36	50	85	0.36	2
65011005000951	5.0t	95	Untreated	20	36	50	95	0.4	2
65011005000952	5.0t	95	HDG	20	36	50	95	0.4	100
65011005001101	5.0t	110	Untreated	20	36	50	110	0.43	100
65011005001102	5.0t	110	HDG	20	36	50	110	0.43	2

65011005001201	5.0t	120	Untreated	20	36	50	120	0.46	100
65011005001202	5.0t	120	HDG	20	36	50	120	0.46	2
65011005001401	5.0t	140	Untreated	20	36	50	140	0.49	100
65011005001402	5.0t	140	HDG	20	36	50	140	0.49	2
65011005001601	5.0t	160	Untreated	20	36	50	160	0.56	2
65011005001602	5.0t	160	HDG	20	36	50	160	0.56	2
65011005001801	5.0t	180	Untreated	20	36	50	180	0.61	100
65011005001802	5.0t	180	HDG	20	36	50	180	0.61	2
65011005002101	5.0t	210	Untreated	20	36	50	210	0.69	100
65011005002102	5.0t	210	HDG	20	36	50	210	0.69	2
65011005002401	5.0t	240	Untreated	20	36	50	240	0.76	100
65011005002402	5.0t	240	HDG	20	36	50	240	0.76	2
65011005003401	5.0t	340	Untreated	20	36	50	340	1.01	100
65011005003402	5.0t	340	HDG	20	36	50	340	1.01	2
65011005004801	5.0t	480	Untreated	20	36	50	480	1.36	2
65011005004802	5.0t	480	HDG	20	36	50	480	1.36	2

## Blueprint

