


## Anchor Starcon Load Group 2.5 t

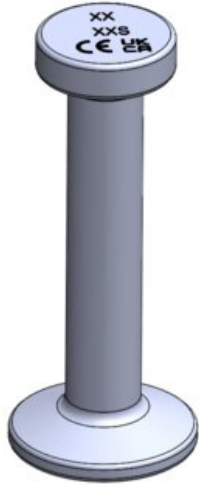

### Product information

The Starcon spherical head anchor load group 2,5 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the Starcon spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

**Note:** The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011002500451	2.5t	45	Untreated	14	26	35	45	0.12	100
65011002500452	2.5t	45	HDG	14	26	35	45	0.12	100
65011002500551	2.5t	55	Untreated	14	26	35	55	0.13	2
65011002500552	2.5t	55	HDG	14	26	35	55	0.13	2
65011002500681	2.5t	68	Untreated	14	26	35	68	0.15	2
65011002500682	2.5t	68	HDG	14	26	35	68	0.15	2
65011002500851	2.5t	85	Untreated	14	26	35	85	0.17	100
65011002500852	2.5t	85	HDG	14	26	35	85	0.17	2
65011002501201	2.5t	120	Untreated	14	26	35	120	0.21	100
65011002501202	2.5t	120	HDG	14	26	35	120	0.21	2
65011002501401	2.5t	140	Untreated	14	26	35	140	0.23	2
65011002501402	2.5t	140	HDG	14	26	35	140	0.23	2
65011002501701	2.5t	170	Untreated	14	26	35	170	0.27	2
65011002501702	2.5t	170	HDG	14	26	35	170	0.27	2
65011002502801	2.5t	280	Untreated	14	26	35	280	0.4	2
65011002502802	2.5t	280	HDG	14	26	35	280	0.4	2

## Blueprint

