


## Anchor Starcon Load Group 10 t

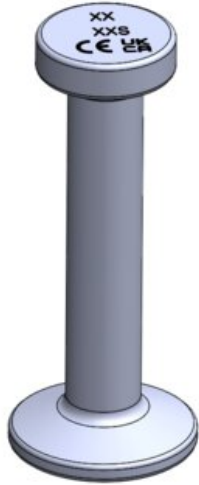

### Product information

The Starcon spherical head anchor load group 10 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the Starcon spherical anchor is attached to a Starcon Lifting eye, standard coupling lifting eye for lifting.

The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

**Note:** The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011010001151	10.0t	115	Untreated	28	47	70	115	0.92	2
65011010001152	10.0t	115	HDG	28	47	70	115	0.92	100
65011010001201	10.0t	120	Untreated	28	47	70	120	0.95	2
65011010001202	10.0t	120	HDG	28	47	70	120	0.96	100
65011010001351	10.0t	135	Untreated	28	47	70	135	0.99	100
65011010001352	10.0t	135	HDG	28	47	70	135	1.01	100
65011010001501	10.0t	150	Untreated	28	47	70	150	1.09	2
65011010001502	10.0t	150	HDG	28	47	70	150	1.09	2
65011010001701	10.0t	170	Untreated	28	47	70	170	1.18	100
65011010001702	10.0t	170	HDG	28	47	70	170	1.18	100
65011010002201	10.0t	220	Untreated	28	47	70	220	1.44	100
65011010002202	10.0t	220	HDG	28	47	70	220	1.44	2
65011010002501	10.0t	250	Untreated	28	47	70	250	1.56	100
65011010002502	10.0t	250	HDG	28	47	70	250	1.56	2
65011010003401	10.0t	340	Untreated	28	47	70	340	1.98	100
65011010003402	10.0t	340	HDG	28	47	70	340	1.98	100
65011010006801	10.0t	680	Untreated	28	47	70	680	3.57	100
65011010006802	10.0t	680	HDG	28	47	70	680	3.57	100

## Blueprint

