


Selantic Sling

Product information

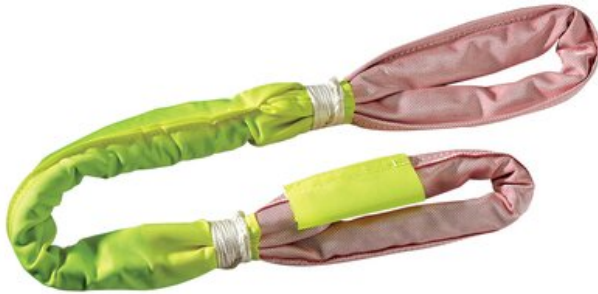

Sling designed especially for heavy on- and offshore lifting, subsea installation, mooring, tethering or project-specific lifting.

Jacket: Cordura® cut resistant cover, and special design wear protection in critical areas.

Capacity: 1 to >2000 Te MBL.

Length: 0,8 to 150 m.

Length tolerance: $\pm 0,15\%$ of nominal length.

Certifications: DNV, CEN and ILO.

Features

- Lightweight and flexible
- Safe and easy to handle
- No damage to painted surfaces
- Durable construction
- Heat resistant and non conductive
- Available with fluorescent jacket for subsea applications
- Design optimization through material selection

Rope construction: Parallel laid endless filaments.

Material: Aramid, HMPE, LCP or blends.

MBL ton	WLL (7:1) ton	WLL (5:1) ton	Min. req. pin dia. mm	Delivery time
1,000	143	200	210	10
105	15	21	55	10
140	20	28	65	10
175	25	35	70	10
210	30	42	75	10
280	40	56	90	10
350	50	70	100	10
35	5	7	35	10
420	60	84	113	10
560	80	112	140	10
630	90	126	155	10
700	100	140	165	10
70	10	14	45	10
800	115	160	180	10
900	130	180	200	10