


Selantic Sling

Product information

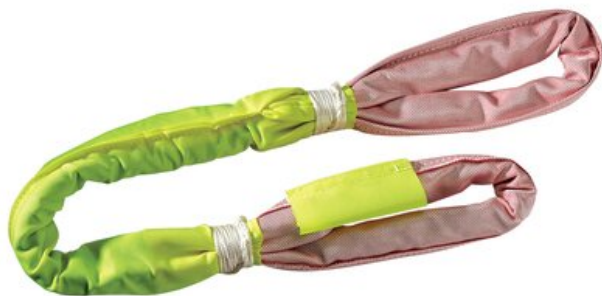

Sling designed especially for heavy on- and offshore lifting, subsea installation, mooring, tethering or project-specific lifting.

Jacket: Cordura® cut resistant cover, and special design wear protection in critical areas.

Capacity: 1 to >2000 Te MBL.

Length: 0,8 to 150 m.

Length tolerance: $\pm 0,15\%$ of nominal length.

Certifications: DNV, CEN and ILO.

Features

- Lightweight and flexible
- Safe and easy to handle
- No damage to painted surfaces
- Durable construction
- Heat resistant and non conductive
- Available with fluorescent jacket for subsea applications
- Design optimization through material selection

Rope construction: Parallel laid endless filaments.

Material: Aramid, HMPE, LCP or blends.

Safety factor: 7:1

**WLL
ton**

5

10

15

20

25

30

40

50

60

80

90

100

115

130

143