


Flat Cable Towing Trolley

Product information

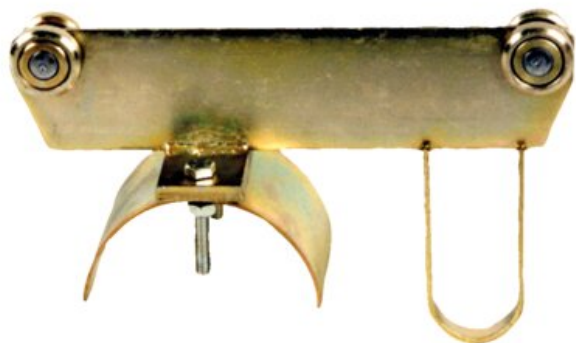

This trolley is pulled along by means of a towing arm fitted to the travelling device and inserted into the stirrup section of the trolley. It cannot be used on curved tracks.

Note: If the thickness of cables is larger than "C" normal, then when the trolley comes close together the cables collide and might wear. In this case use a bigger "NIKO" series or ask us for spec

Part Code	Profile No.	Max. cable dimension mm	L mm	A mm	B mm	D mm	e mm	R mm	r mm	c normal mm	Delivery time
600521M10	2100/21010	55x20	165	94	40	55	15	25	20	12	2
600524M10	24,000	55x40	260	94	60	55	15	55	20	24	10
600524M11	24,000	100x40	260	94	60	100	15	55	20	24	10
600525M10	25,000	150x50	360	156	90	150	20	70	40	38	10

Blueprint

