

GANTERUD L12 Pro

Proven and robust technology in a new application

Radio-controlled precision
levelling and handling.
Maximises efficiency,
reduces installation time
and increases safety



GANTERUD L12 Pro



Levelling of both light and heavy objects

The L12 Pro levelling device uses both new and proven technology to level loads efficiently and safely with a high degree of precision. The levelling equipment can handle both light and heavy objects from 0 kg up to 12 tonnes.

Turning heavier objects 90 degrees

Here, the L12 Pro can be used as a snatch block. The chain wheel is disengaged using the remote control for free-running chain with the same function as a snatch block. Longer chain packages can be ordered as an option.

Precise and comprehensive levelling

The L12 Pro has a reversible stroke length of up to 4 metres per hook and can be precision levelled at two speeds.

Increases productivity rate many times over

The L12 Pro levels the objects it is lifting easily and safely with the simple press of a button, reducing both expensive crane time and waiting times.

Strong and robust

Thanks to its robust, tried and tested technology, combined with reliable electrical operation, the L12 Pro is able to operate in temperatures ranging from -20 to +40 degrees Celsius in demanding environments.

Sturdy, durable and reliable

The sturdy casing, along with the IP65-rated electrical system, means that the L12 Pro is easy to clean.


Radio control

With its user-friendly, IP67-rated remote control, the L12 Pro is easy to operate.

Minimal service

Other than cleaning, the only thing you need to think about is charging the battery. The battery status is indicated on the levelling equipment and, with normal use, it is sufficient to charge the battery once a week.



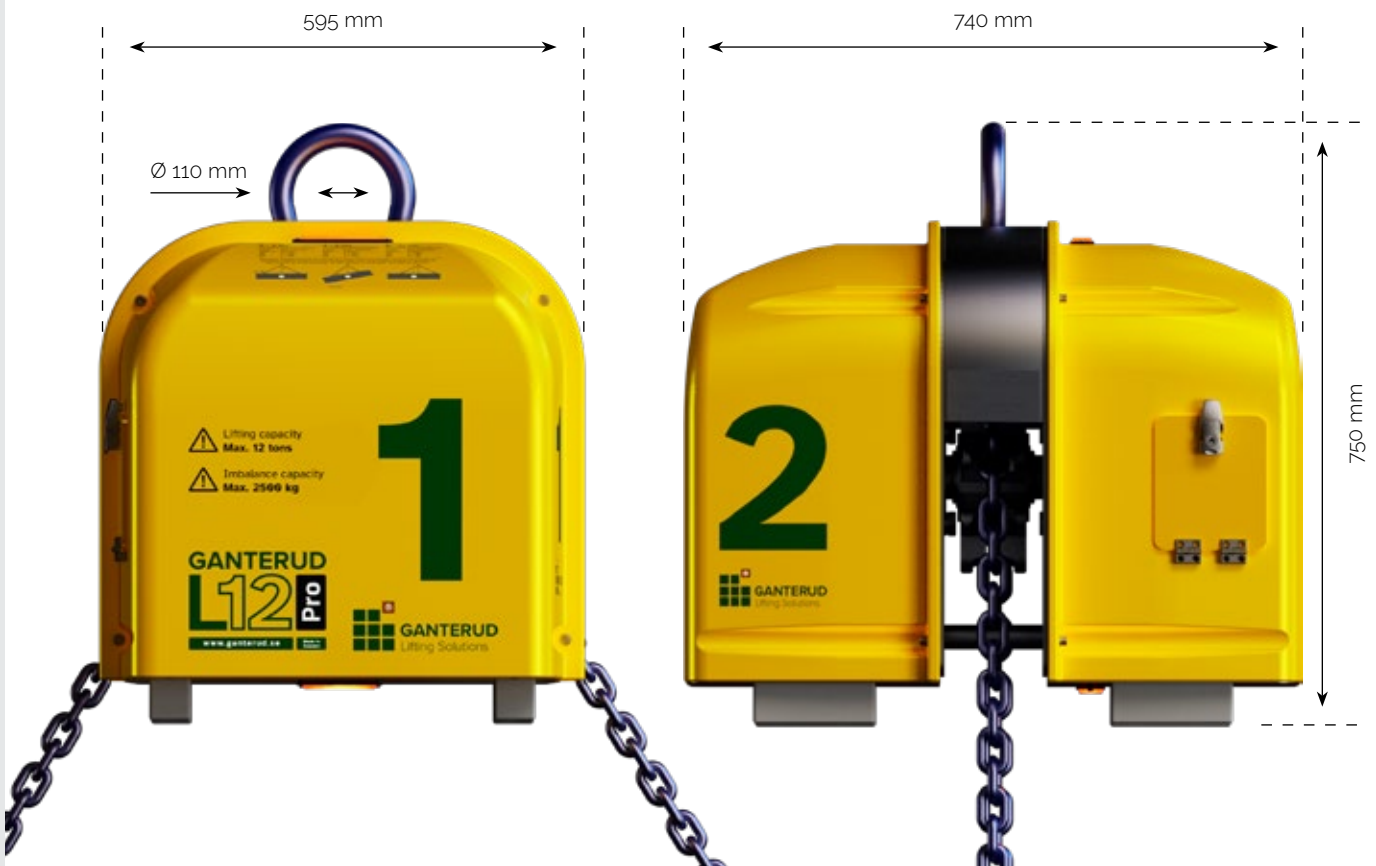

Technical data

Lifting capacity:.....Max. 12 tonnes
 Load imbalance capacity:.....Max. 2.5 tonnes
 Max. levelling length:.....4 m (2 m in both directions) in standard version.
 Two levelling speeds
 Max. chain angle:.....60° at 12 tonne load
 Total chain length.....4 m in standard version.
 Chain dimensions.....48x16 mm
 Unloaded weight.....approx. 295 kg (incl. chain and hooks)
 Height.....750 mm
 Width.....740 mm
 Depth.....595 mm

Control system

Radio range:.....100 m unobstructed view
 Voltage, electric motor:.....24 VDC
 Power consumption, rest:.....50 mA
 Power consumption, max. continuous:.....24 A
 Power consumption, peak:.....30 A

Certification

CE marked product

Environmental requirements

Operating temperature:.....-20°C to +40°C
 Storage temperature:.....-20°C to +45°C
 Relative humidity (RH):.....0-90% during storage

Optional extra equipment

Protective cover
 Chain kit in other lengths
 Extra batteries
 Transport packaging

We reserve the right to alter specifications or designs without prior notification, and make reservation for any factual errors. Variations in specifications and equipment standards may occur between different geographical markets. Please contact us for more information regarding applicable product specifications and local adaptations.



Ganterud Lifting Solutions AB
 www.ganterud.se



Ganterud Lifting Solutions AB is a product company that develops and supplies effective, reliable and innovative lifting systems to facilitate the handling of materials and improve profitability, primarily within the construction and engineering sectors.



Dealer:

CERTEX

CERTEX Danmark A/S
Trekanten 6-8
DK-6500 Vojens
Tlf: +45 74 54 14 37
certex.dk
info@certex.dk



Ganterud Lifting Solutions AB
Frögatan 10
SE 653 36 Karlstad
Sweden
www.ganterud.se