

# GANTERUD L5 Pro Robust, tried and tested technology in a new application

Radio-controlled precision levelling  
and handling. Maximises  
efficiency, reduces  
installation time and  
increases safety



# GANTERUD L5 Pro



## Levelling both light and heavy objects

L5 Pro is a lifting yoke that uses new and proven technology to level loads efficiently and safely at high levels of precision. The lifting yoke can handle both light and heavy objects ranging from 0 kg up to 5 tonnes.

## Turning heavier objects 90 degrees

Here, the L5 Pro can be used as a snatch block. The chain wheel can be disengaged via remote control for a free-running chain that operates the same as a snatch block. Longer chain packages can be ordered as an option.

## Accurate and wide-ranging levelling

The L5 Pro has a reversible length of up to 3 metres per hook and can be precision levelled at two speeds.

## Increases the productivity rate many times over

At the touch of a button, the L5 Pro can easily and safely level its objects. Expensive crane times and waiting times are reduced.

## Robust and strong

A robust and proven technology, as well as a reliable electric drive ensures that the L5 Pro can operate in all weather, from -20 to 40 degrees Celsius, in the most demanding environments.

## Sturdy, durable and reliable

The sturdy casing, along with the IP65 rated electrical system, makes the L5 Pro easy to clean.


## Radio control

With a user-friendly and IP67-rated remote control, the L5 Pro always operates smoothly.

## Minimal Service

All you need to think about, apart from cleaning it, is charging the battery. Battery status is indicated on the yoke and, for normal use, one charge per week is sufficient.



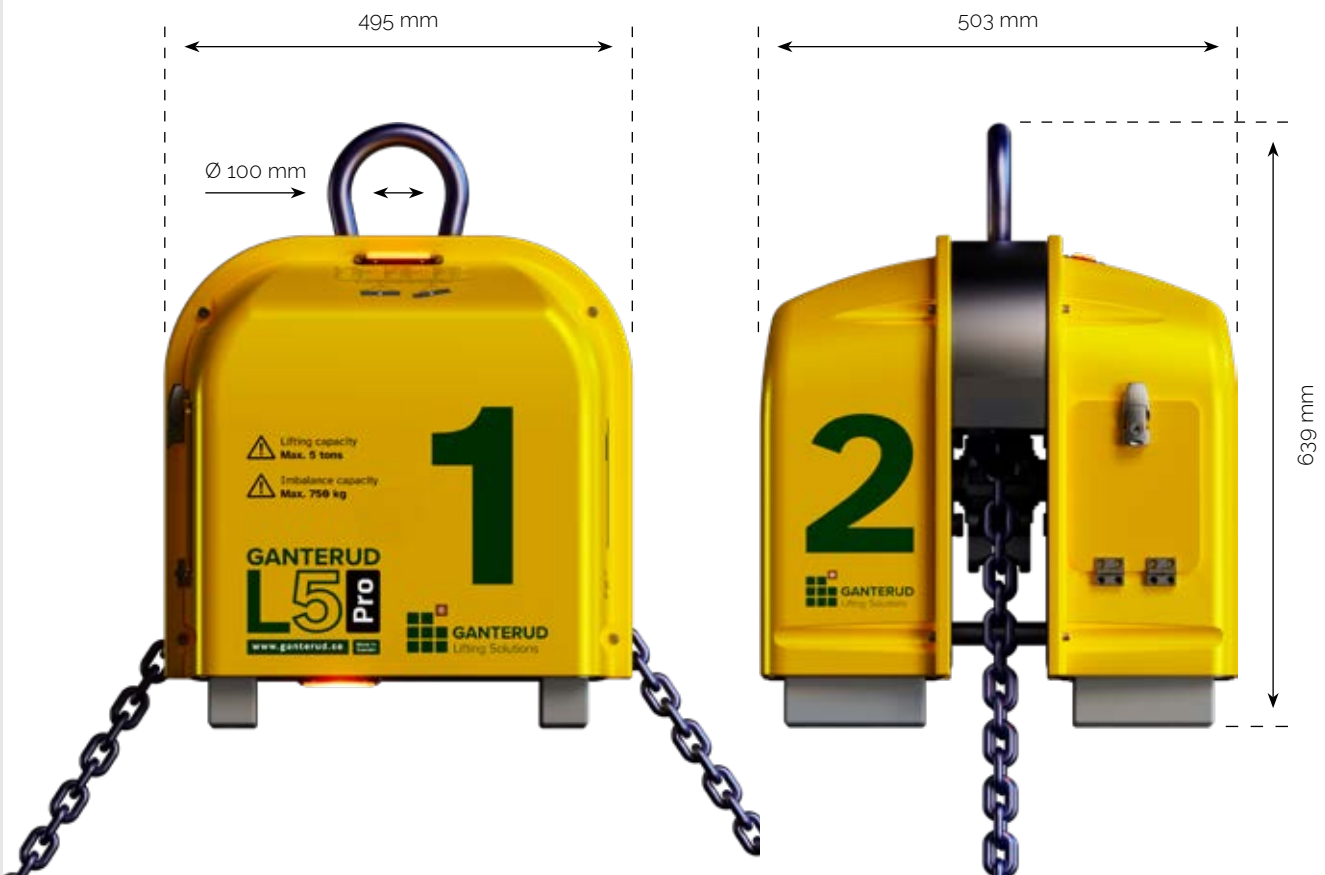

### Technical data

Lifting capacity:.....Max. 5 tons  
Load imbalance capacity:.....Max. 750 kg  
Max. levelling length:.....3 m (1.5 m in both directions)  
in the standard version.

Two levelling speeds

Max. chain angle:.....60°  
at 5 ton load

Total chain length.....3 m in the standard version.

Chain dimensions.....30.5x10 mm.

Unloaded weight.....ca. 130 kg  
(incl. chain and hooks)

Height.....638 mm

Width.....503 mm

Depth.....495 mm

### Control system

Radio range:.....100 m unobstructed view

Voltage, electric motor:.....24 VDC

Power consumption, rest: .....50 mA

Power consumption, max. continuous: 24 A

Power consumption, peak.....30 A

### Certifiering

CE marked product

### Environmental requirements

Operating temperature: .....-20°C to +40°C

Storage temperature:.....-20°C to +45°C

Relative humidity (RH):.....0–90% during storage

### Optional extra equipment

Protective cover  
Chain kit in other lengths  
Extra batteries  
Transport packaging

We reserve the right to alter specifications or designs without prior notification, and make reservation for any factual errors. Variations in specifications and equipment standards may occur between different geographical markets. Please contact us for more information regarding applicable product specifications and local adaptations.



Ganterud Lifting Solutions AB  
[www.ganterud.se](http://www.ganterud.se)



Ganterud Lifting Solutions AB is a product company that develops and supplies effective, reliable and innovative lifting systems to facilitate the handling of materials and improve profitability, primarily within the construction and engineering sectors.



Dealer:



CERTEX Danmark A/S  
Trekanten 6-8  
DK-6500 Vojens  
Tlf: +45 74 54 14 37  
certex.dk  
info@certex.dk



Ganterud Lifting Solutions AB  
Frögatan 10  
SE 653 43 Karlstad  
Sweden  
[www.ganterud.se](http://www.ganterud.se)