


## Anchor Starcon Load Group 1.3 t

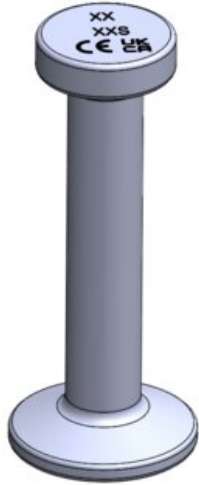

### Product information

The Starcon spherical head anchor load group 1,3 t is a steel component made for concrete casting. The foot of the anchor is constructed especially for strong concrete anchorage.

The cylindrical head of the STARCON spherical anchor is attached to a STARCON Lifting eye, standard coupling lifting eye for lifting.

The Starcon product is designed according to EN13155-2009 and follows the guidelines in VDI/BV-BS 6205 and DS/CEN/TR 15728.

**Marking:** CE-marked, UKCA-marked, Batch code, Load group+S (Starcon)

**Finish:** Untreated, hot dip galvanized or stainless

**Note:** The delivery time for the individual products is estimated. If the desired quantity is not in stock, please contact CERTEX Danmark A/S [Starcon](#) for information on the applicable delivery time.

Part Code	Load grp.	Length mm	Finish	D mm	D1 mm	D2 mm	L mm	Weight kg	Delivery time
65011001300401	1.3t	40	Untreated	10	19	25	40	0.05	100
65011001300402	1.3t	40	HDG	10	19	25	40	0.05	2
65011001300551	1.3t	55	Untreated	10	19	25	55	0.06	2
65011001300552	1.3t	55	HDG	10	19	25	55	0.06	2
65011001300651	1.3t	65	Untreated	10	19	25	65	0.07	2
65011001300652	1.3t	65	HDG	10	19	25	65	0.07	2
65011001300851	1.3t	85	Untreated	10	19	25	85	0.08	2
65011001300852	1.3t	85	HDG	10	19	25	85	0.08	2
65011001301201	1.3t	120	Untreated	10	19	25	120	0.1	2
65011001301202	1.3t	120	HDG	10	19	25	120	0.1	2
65011001302402	1.3t	240	HDG	10	19	25	240	0.17	100

## Blueprint

